

PROFESSIONAL HIGH SPIN WASHERS EXTRACTORS

WPR 8 ET2
WPR 10 ET2



ROBUSTNESS

- Robust door in aluminium,
- Vat, drum and ribs in AISI 304 stainless steel,
- Industrial house bearing and bearings,
- Gear and inverter same as industrial washer,
- Industrial door lock system,
- No inner drum seal,
- Easy to maintain, clean, more industrial.



FEATURES

- User friendly, fully programmable 4,3" EASY TOUCH 2,
- 8 dosing signals as standard,
- USB connection. PC Software free of charge for programming, traceability, data analyses...
- Remote communication ready,
- Multi-payable system,
- Videos shown on display (ads, instructions...),
- Short washing cycles (heating power 6 kw).



VERSATILITY

- OPL <> COIN: standard model easily transformable.
- ELECTRIC <> HOT WATER
- DRAIN VALVE <> PUMP
- SINGLE <> STACKED
- WET CLEANING features as standard.



EFFICIENCY

- Intelligent weighing system,
- Optimal loading: water and chemicals adapted to the load,
- Plinth for better ergonomics,
- Plinth for mops,
- Plinth with tank for water recovery,
- High G force 450 : reduced residual moisture, reduced drying time.



OTHERS

- Grey skinplate outercasing,
- Free standing: no need to be anchored to the floor,
- 2 water inlets,
- Detergent dispenser with 4 compartments,
- LOADING AID feature: water and rotation control,
- Imbalance electronic control with frequency inverter,
- Levelling feet included.
- Model with drain valve and model with pump.




WPR + plinth

OPTIONS

- Relay card 6 extra dosing signals (total 14 signals).
- Plinth for ergonomic loading height.
- Plinth for mops (filter included). Only model with valve.
- Plinth for water recovery.
- Double drain kit (valve mod. only).
- Reversing door opening.
- Automatic door unlock device in case of power outage.
- AISI-304 stainless steel panels.
- Danube Online communication kit.
- Printer.
- Door silicone gasket.
- "NC" normally closed drain valve.
- Valve-Pump transformation kit.
- Self-service kits: coin or token meter + coin/token box, central pay.
- Ship voltage: 440V III 50/60 Hz no neutral

TECHNICAL DATA	UNIT.	WPR8 V	WPR8 P	WPR10 V	WPR10 P				
DRUM									
Capacity 1:9 / 1:10	Kg	9/8	9/8	11/10	11/10				
Volume	l	80	80	100	100				
Diameter	mm	532	532	532	532				
Depth	mm	360	360	425	425				
GENERAL DETAILS									
Washing / spinning speed	r.p.m.	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250				
G Factor	-	450	450	450	450				
Self service version	-	Yes	Yes	Yes	Yes				
Double drain	-	Opt	No	Opt	No				
Weighing system / Tilting system	-	No	No	No	No				
DOOR									
Height door centre / door base	mm	537/280	537/280	537/280	537/280				
Diameter	mm	373	373	373	373				
DYNAMIC FORCES									
Maximum transmitted force	KN	1,47 ± 0,53	1,47 ± 0,53	1,47 ± 0,53	1,47 ± 0,53				
Dynamic force frequency	Hz	18,33	18,33	18,33	18,33				
POWER									
Motor	kW	0,75	0,75	0,75	0,75				
Heating power	kW	6	6	6	6				
Max. electrical power (Elec. model)	kW	6,25	6,25	6,25	6,25				
Max. electrical power (Hot water model)	kW	0,75	0,75	0,75	0,75				
CONNECTIONS									
		E	HW	E	HW	E	HW	E	HW
Tension 230V I+N+T 50/60Hz	Nº x mm2/A	3x6 - 32A	3x1,5-10A	3x6 - 32A	3x1,5-10A	3x6 - 32A	3x1,5-10A	3x6 - 32A	3x1,5-10A
Tension 230V III+T 50/60Hz	Nº x mm2/A	4x2,5- 20A		4x2,5 - 20A		4x2,5 - 20A		4x2,5 - 20A	
Tension 400V III+N+T 50/60Hz	Nº x mm2/A	4x2,5- 20A		4x2,5 - 20A		4x2,5 - 20A		4x2,5 - 20A	
Tension 110V I+N+T 50/60Hz	Nº x mm2/A		3x2,5- 20A		3x2,5- 20A		3x2,5- 20A		3x2,5 - 20A
Tension 400 III+T 50/60Hz	Nº x mm2/A	5x2,5-16A		5x2,5 - 16A		5x2,5-16A		5x2,5-16A	
Water inlets	Inch	3/4"		3/4"		3/4"		3/4"	
Drain	mm/inch	50 / 2"		25 / 1" (pump)		50 / 2"		25 / 1" (pump)	
DIMENSIONS / PACKING DIMENSIONS									
Length / Length	mm	680/710		680/710		680/710		680/710	
Depth / Depth	mm	698/832		698/832		742/832		742/832	
Height / Height	mm	1.040/1.130		1.040/1.130		1.040/1.130		1.040/1.130	
Net weight / Gross weight	kg	140/150		140/150		150/160		150/160	
Volume	m ³	0,67		0,67		0,67		0,67	
Noise level	Db	<70		<70		<70		<70	

V= Drain valve / P = Pump

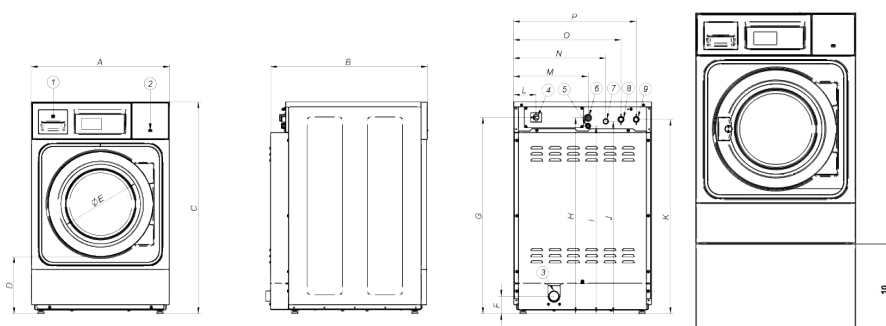

01. Soap dispenser
02. Usb port
03. Drain
04. Main switch
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Liquid soap inlet
08. Cold water inlet
09. Hot water inlet
10. Plinth height 389mm

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
WPR-8 V	680	698	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
WPR-8 P	680	698	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-
WPR10 V	680	742	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
WPR-10 P	680	742	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-