

DRYING

SINGLE POCKET DRYERS ECONOMIC LINE SC-11/14 M



CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Frequency inverter as standard
- Galvanized drum as standard

EFFICIENCY

- Big fluff filter

VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily transformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console

OTHERS

- White painted panels
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- Opposite door opening
- M programmer display
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA

SINGLE POCKET DRYERS | ECONOMIC LINE | SC-11/14 M

	UNIT.	SC-11 M	SC-14 M		
CAPACITY					
Capacity 1/18	Kg	12	15		
Capacity 1/20	Kg	11	13,5		
Hourly Output ECONOMIC LINE*	Kg/h	23-21	34-30		
Evaporation capacity ECONOMIC LINE*	l/h	14,5	15,40		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	610		
Drum volume	l	210	270		
POWER					
Drum motor power	Kw	0,37	0,37		
Fan motor power ECONOMIC LINE	Kw	0,25	0,25		
Electric heating power ALL RANGES	Kw	12	18		
Total electric power (elec.model) ECONOMIC LINE	Kw	12,67	18,67		
Gas heating power ALL RANGES	Kw	20,51	20,51		
Total electric power (gas model) ECONOMIC LINE	Kw	0,67	0,67		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	N° x mm ² / A	3 x 25 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm ² / A	4 x 10 / 40A	3 x 1,5 / 20A	4x16 / 63A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm ² / A	5 x 4 / 25A	3 x 1,5 / 20A	5x10 / 32A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"			
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	855 / 940		989 / 1074	
Net Height / Gross Height	mm	1.694 / 1.840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		180 / 190	
OTHERS					
Max airflow ECONOMIC LINE	m ³ /h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level ECONOMIC LINE	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

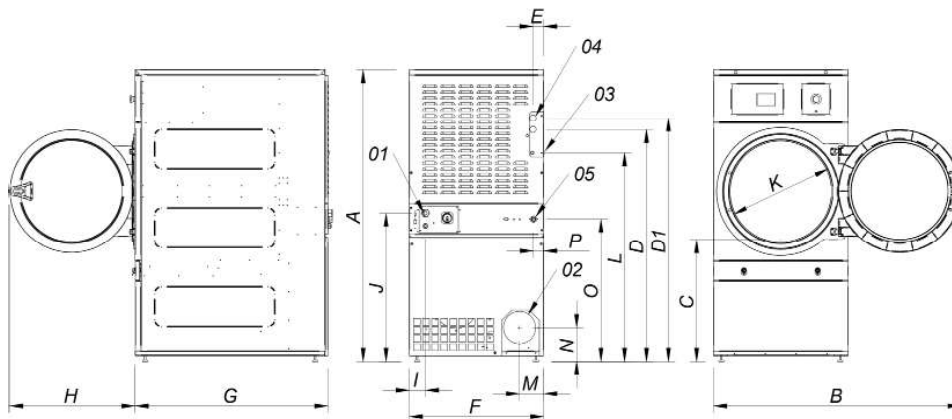

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SC-11	1694	1447	689	1354	1422	68	68	785	855	735	95	870	575	1226	133	180	830	65
SC-14	1694	1447	689	1354	1422	68	68	785	989	735	95	870	575	1226	133	180	830	65