

DRYING

SINGLE POCKET DRYERS ECONOMIC LINE SC-28/35 M



CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Frequency inverter as standard
- Galvanized drum as standard

EFFICIENCY

- Big fluff filter

VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily transformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console

OTHERS

- White painted panels
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- M programmer display
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA

SINGLE POCKET DRYERS | ECONOMIC LINE | SC-28/35 M

	UNIT.	SC-28 M	SC-35 M		
CAPACITY					
Capacity 1/18	Kg	31	37		
Capacity 1/20	Kg	28	33		
Hourly Output ECONOMIC LINE*	Kg/h	56-53	70-65		
Evaporation capacity ECONOMIC LINE*	l/h	30,9	32,10		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1040	1040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan motor power ECONOMIC LINE	Kw	0,55	0,55		
Electric heating power ALL RANGES	Kw	30	36		
Total electric power (elec.model) ECONOMIC	Kw	31,15	37,15		
Gas heating power ALL RANGES	Kw	41	41		
Total electric power (gas model) ECONOMIC	Kw	1,15	1,15		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 35 / 100A	3 x 1,5 / 20A	4 x 50 / 125A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 16 / 63A	3 x 1,5 / 20A	5 x 16 / 63A	3 x 1,5 / 20A
Ø Gas inlet	BSP				
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	985 / 1065		985 / 1065	
Net Depth / Gross Depth	mm	1054 / 1154		1210 / 1310	
Net Height / Gross Height	mm	1975 / 2080		1975 / 2080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230 / 260		260 / 285	
OTHERS					
Max airflow ECONOMIC LINE	m3/h	1200		1200	
Ø Fume exhaust	mm	200		200	
Sound level ECONOMIC LINE	dB	65		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

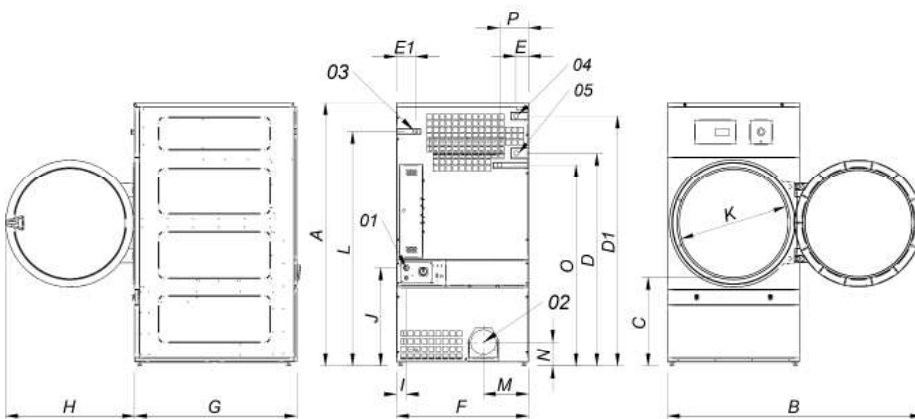

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 1"
- 05 CONDENSATE OULET 1"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SC-28	1975	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	1510	215
SC-35	1975	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	1510	215