



IRONING

WALL
IRONERS

PE-25/100-120-140

ESPECIALLY CONCEIVED FOR
THE FIELD OF RESTAURANTS AND SMALL
PRODUCTIONS.



CHARACTERISTICS

Can be positioned in very limited spaces and require hardly any installation since they do not have any kind of exhaust or connection, except to the electricity supply.

- **Wall machines:** entry and exit of linen at the front.
- Unit exterior in sandwich board and upper panel in stainless steel.

- Roller dimensions: from 1,000 / 1,200 / 1,400 mm wide and diameter of 250 mm.
- Electronic microprocessor for temperature control.
- Electric heating.
- **Standard model:** Polished steel roller with polyester sleeve and cotton sheath.

- **Nomex Model:** with Nomex sleeve and sheath, allowing operation at high temperatures up to 190 °C.
- Aluminium bucket specially treated for higher performance.
- Automatic movement of the bucket.



OPTIONS:

- Special voltages.



TECHNICAL DATA

	UNIT.	PE-25/100	PE-25/120	PE-25/140
GENERAL DATA				
Theoretical production 20-25 % moisture	kg/h	30	35	40
Ø Roller	mm	250	250	250
Useful width	mm	1,000	1,200	1,400
Operational speed	mt/min	4.2	4.2	4.2
Electronic programmer	-	Yes	Yes	Yes
Movement of the bucket	-	Auto	Auto	Auto
POWERS				
Power Heating Elements	kW	4.95	6	7
Power Roller Motor	kW	0.18	0.18	0.18
Total Electrical Power	kW	5.13	6.18	7.18
Voltage	V	400V III 50 Hz (option of 230V I)	400V III 50 Hz (option of 230V I)	400V III 50 Hz (option of 230V I)
DIMENSIONS				
Width	mm	1,400	1,600	1,800
Depth	mm	445	445	445
Height	mm	1,005	1,005	1,005
Weight	kg	86	99	107
Volume	m ³	0.63	0.72	0.81
DIMENSIONS WITH PACKAGING				
Width	mm	1,490	1,690	1,900
Depth	mm	540	540	540
Height	mm	1,140	1,140	1,140
Weight	kg	115	122	134
Volume	m ³	0.92	1.04	1.17
OTHER				
Noise Level	dB	55	55	55

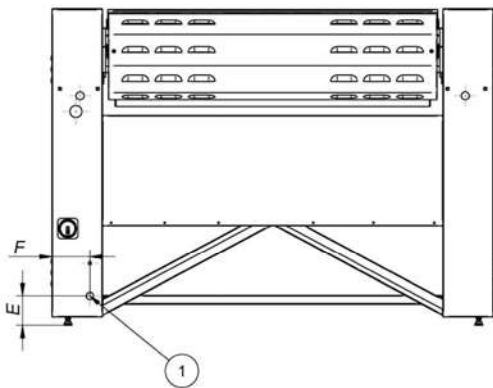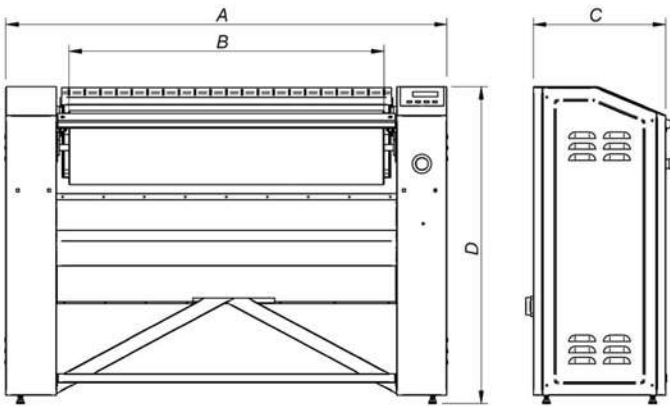

	MODEL	A	B	C	D	E	F
ELECTRICAL CONNECTION	PE-25/100	1,400	1,000	420	1,005	93	120
	PE-25/120	1,600	1,200	420	1,005	93	120
	PE-25/140	1,800	1,400	420	1,005	93	120